



# FA 20 402 10B, FA 20 402 10S


## Helixon



①



②







③



④



④

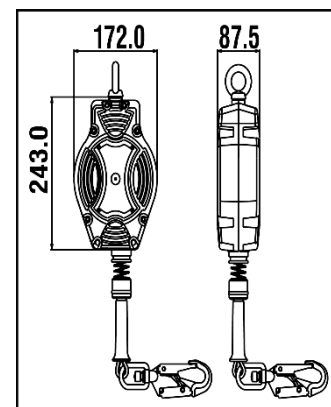

|   |
|---|
| <b>HS CODE</b>  |
| 84798997  |
| <b>CARTON SIZE / PCS.</b>   |
| 60 x 40 x 24 cm / 4   |
| <b>AET N°2777/10832-02/E01-01</b>   |
| <b>Satra Technology Europe Ltd., N° 2777,</b><br>Bracetown Business Park, Clonee,<br>Dublin, D15YN2P, Ireland |
| <b>MODULE D FI14/14003.02</b>   |
| <b>SGS Fimko Oy, N°0598</b><br>Takomotie 8,<br>00380 HELSINKI, Finland  |
| <b>ACKNOWLEDGEMENT OF RECEIPT N°3975/1/2018 (ATEX)</b>  |
| <b>Technická Inšpekcia, a.s. N°1354</b><br>Trnavská cesta 56, 821 01 Bratislava, Slovenská Republika          |

| REF.                        | FA 20 402 10B   | FA 20 402 10S   |
|-----------------------------|---|---|
| <b>LG.</b><br><br><b>KG</b> | 10 m  |   |
| <b>CE</b>                   | EN 360:2002   |   |
| <b>MAT.</b><br>             | Polyamide 6 - 30% fiber glass   |   |
|                             | <br><b>STEEL</b> Ø4.5 mm<br>FA 50 101 17 / FA 50 203 20 with fall indicator | <br><b>INOX</b> Ø4.5 mm<br>FA 50 101 17 / stainless steel connector with fall indicator |
| <br><b>360°</b>             | x2  |   |
| <b>R(kN)</b>                | 12 kN   |   |
|                             | NO  |   |
| <b>+</b>                    | <br>EN 360 §4.6 (endurance test)  |   |
|                             | 4.27 KG   | 4.28 KG   |

**LG.**  
  
**KG**

**Longueur** Poids maxi utilisateur  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers

**MAT.**

**Matière carter / câble**  
 Material of casing / wire rope  
**Material cárter / cable**  
 Material dei carter / cavo  
**Material Gehäuse / Seil**

**Matière connecteur haut / connecteur bas**  
 Material of top connector / bottom connector  
**Material conector alto / conector bajo**  
 Materiale connettore alto / connettore basso  
**Material oberes / unteres Verbindungselement**

**360°**

**Nombre d'émerillons**  
 Number of swivels  
**Cantidad de eslabones giratorios**  
 Numero di tornichetti  
**Anzahl der Wirbel**

**Homologué pour le travail à proximité d'arêtes vives**  
 Approved for work near sharp edges  
**Homologado para trabajo cerca de aristas vivas**  
 Omologato per lavoro in prossimità di spigoli vivi  
**Zugelassen für Arbeiten in der Nähe scharfer Kanten**